Roe screen fabric

Turn over to explore the full Roe fabric range!



ire retardant



acterial




s Li





White back





Multi Size

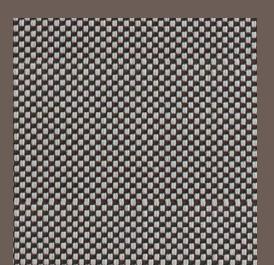

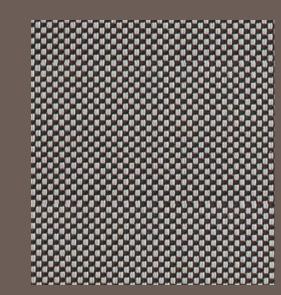

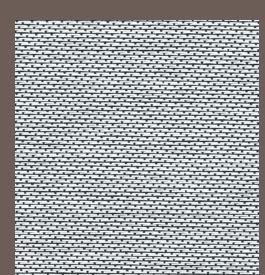

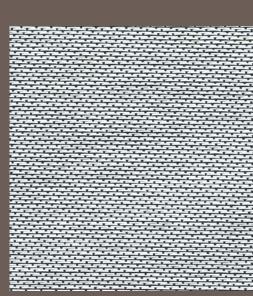

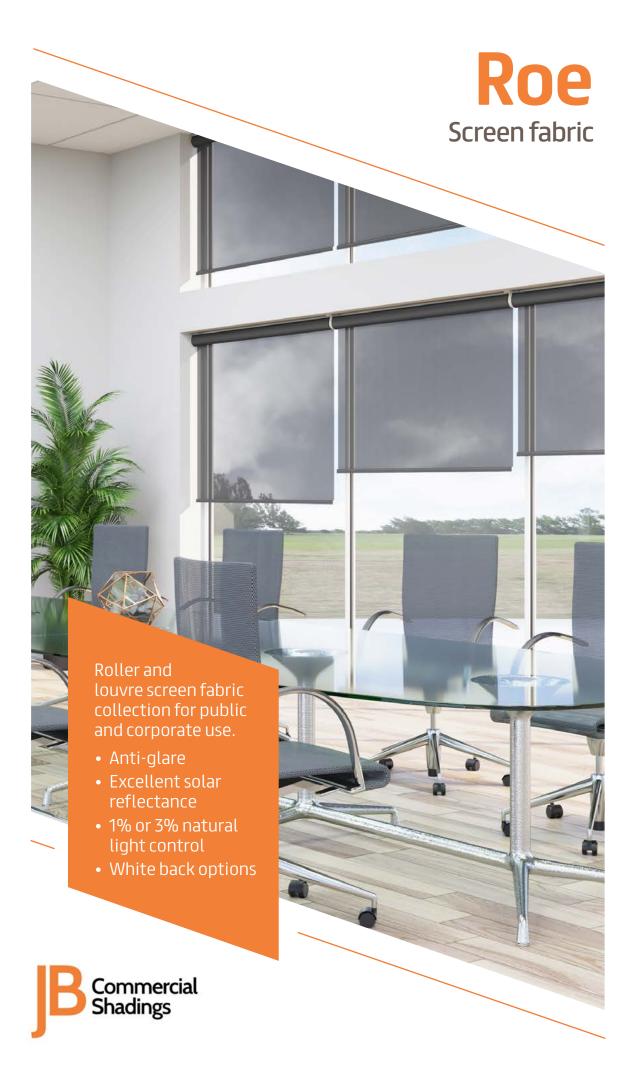



roe fabric


shading efficiency

Transmittance is the amount of light and heat transmitted beyond the fabric. The lower the amount, the greater the efficiency.

Block/reflect is the amount of heat and light that is blocked or reflected. The higher the amount, the greater the efficiency.

Absorption is the amount of heat and light absorbed in the fabric. The higher the amount, the lower the efficiency.

Ultraviolet protection illustrates how protective the fabric is against ultraviolet rays. The higher the amount, the greater the effectiveness.

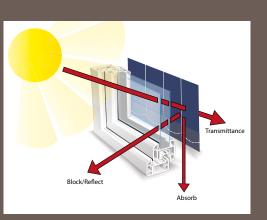



this fabric is

GREENGUARD certified

as a low emissions

product suitable for
indoor use.

| | 3000 mm | 2500 mm | 2000 mm | 89 / 127 mm | 0penness % | Solar Transmittance | Solar Reflectance % | Solar Absorption % | Light Transmittance | Ultraviolet Transmittance | Shading Co-efficiency |
|-----------|---------|---------|---------|-------------|------------|------------------------|------------------------|-----------------------|------------------------|------------------------------|--------------------------|
| Vhite | | | | | 1 | 16 | 69 | 15 | 10 | 2 | 0.33 |
| Vhite | | | | | 3 | 17 | 65 | 18 | 11 | 3 | 0.30 |
| eige | | | | | 1 | 15 | 60 | 25 | 9 | 2 | 0.35 |
| eige | | | | | 3 | 16 | 55 | 29 | 10 | 3 | 0.36 |
| ight Grey | | | | | 1 | 8 | 54 | 38 | 6 | 2 | 0.41 |
| ight Grey | | | | | 3 | 10 | 43 | 47 | 6 | 3 | 0.44 |
| 1id Grey | | | | | 1 | 2 | 30 | 68 | 2 | 1 | 0.53 |
| 1id Grey | | | | | 3 | 7 | 31 | 62 | 4 | 3 | 0.45 |
| ark Grey | | | | | 1 | 1 | 12 | 87 | 1 | 1 | 0.64 |
| ark Grey | | | | | 3 | 3 | 15 | 84 | 3 | 3 | 0.62 |
| ronze | | | | | 1 | 1 | 6 | 93 | 1 | 1 | 0.69 |
| ronze | | | | | 3 | 2 | 5 | 93 | 3 | 3 | 0.64 |
| harcoal | | | | | 1 | 1 | 5 | 94 | 1 | 1 | 0.69 |
| harcoal | | | | | 3 | 2 | 4 | 94 | 3 | 3 | 0.66 |
| | | | | | | | | | | | |

| The following is for the white backed roe (| hloure |
|---|--------|

| Beige | 1 | 20 | 63 | 17 | 10 | 1 | 0.36 | |
|-----------|---|----|----|----|----|---|------|--|
| Beige | 3 | 16 | 59 | 25 | 11 | 2 | 0.33 | |
| ight Grey | 1 | 13 | 60 | 27 | 7 | 1 | 0.37 | |
| ight Grey | 3 | 14 | 54 | 32 | 9 | 3 | 0.36 | |
| 1id Grey | 1 | 7 | 53 | 69 | 4 | 1 | 0.40 | |
| 1id Grey | 3 | 9 | 46 | 45 | 6 | 3 | 0.39 | |
| ark Grey | 1 | 2 | 51 | 47 | 2 | 1 | 0.40 | |
| Oark Grey | 3 | 3 | 40 | 57 | 3 | 2 | 0.57 | |

roe fabric

Roe fabric is a uniquely stylish and popular fabric that offers diverse performance characteristics.

Whilst reducing solar glare, the comfort of natural light is still maintained. A choice of two openness percentages are available, allowing either 1% or 3% of light through.

Roe fabric comes in seven colours, with four colours available with a white back for a uniform external appearance. The flame retardant fabric is designed with commercial, education and healthcare environments in mind.

In this selector, there are fabric samples with both 1% and 3% openness for each colour as well as the four white back options below. If you hold this selector up to the window, you will be able to see the difference in light transmittance on the dark grey fabric.

Fabric Composition: 75% PVC, 25% Polyester 7 / 4 white back

Fabric Range: **Louvre Widths:** 127mm (5") 89mm (3.5")

Louvre Roll Length: 30m Roller Fabric Width: 2000mm (72")

2500mm (98.4") (l)

3000mm (183") (II) Roller Fabric Length: 30m (2000mm/2500mm)

20m (3000mm) Fabric Thickness: 1%: 0.62mm 3%: 0.57mm

Fabric Thickness (WB): 1%: 0.63mm

3%: 0.61mm Fabric Weight: 1%: 496gsm 3%: 445qsm Fabric Weight (WB): 1%: 470gsm

3%: 407gsm Fire Retardancy: Conforms to BS5867,

Part 2: Type B 2008


IMO Certified: IMO 2010 FTP CODE ANNEX 1 PART 7 Shading: High Performance Screen. Suitable


for computer environments **Moisture Resistance:** Suitable for moist conditions

Anti-Bacterial: Biosafe Accreditation Care Instructions: Wipe clean Mesh/in: 54 x 48


Colour Fastness:

4.5 Options: White Backed WB Wider Width 🐠

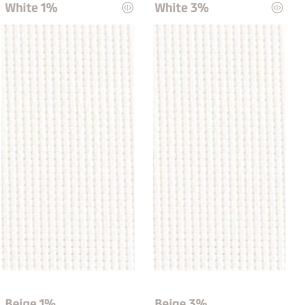


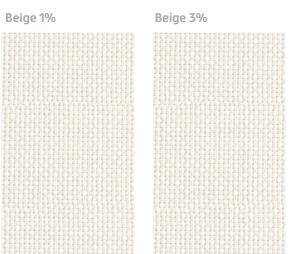




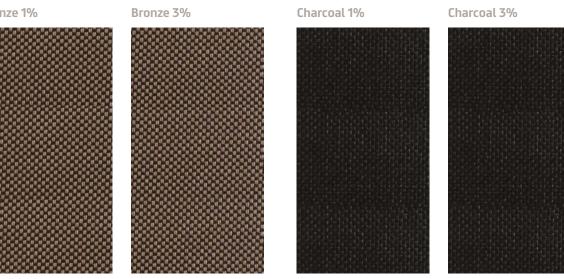


Roe white back:

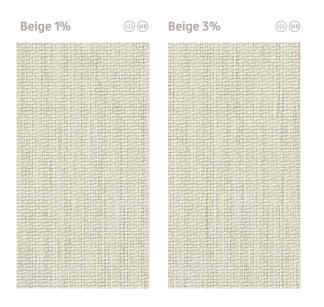

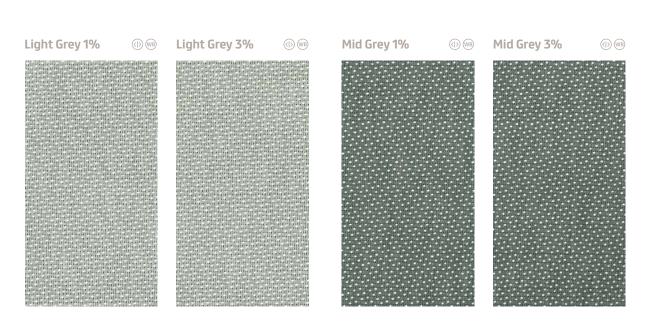

See for yourself... Hold this panel of fabric up to the window to compare the light transmittance between the two different openness samples, with and without a white back.

Roe:

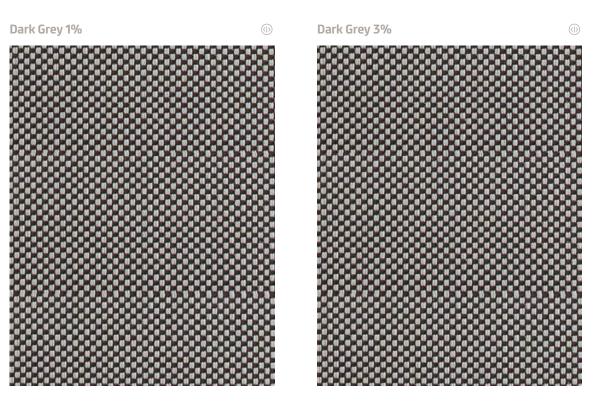

Roe white back:

